
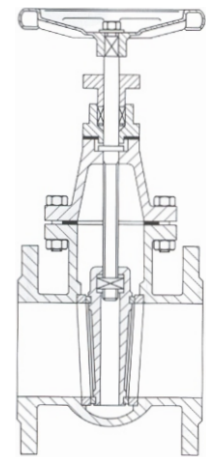


CAST IRON GATE VALVE

**FLANGED ENDS
FACE TO FACE ACC TO
DIN 3202 - F 4
PLUNGED MANDREL**

DN	40 - 300
PN	6 bar
T max	150°C

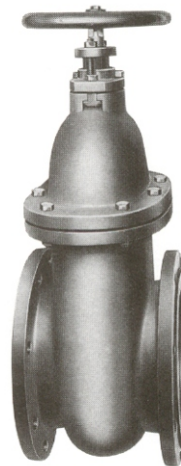


Application: As a closing valves at industrial pipe systems for water or non aggressive fluids.

Materials:	parts	acc to DIN	Ws. №
	Body and bonnet	GG 25	0.6025
	Ring	GG 25	0.6025
	Mandrel	X20Ch13	1.4021
	Gasket	CuZn39Pb2	2.0380
	Seal packing	-non asbestos -O-ring EPDM	

Note: The globe valve is offer with flanges acc to DIN - PN 6.

Size (mm):

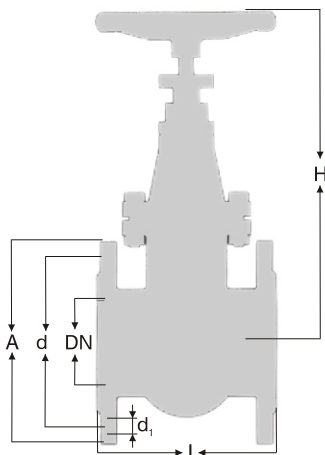

DN	PN	L	H	A	d	n x d ₁	kg
40	6	140	255	130	100	4 x 14	11
50		150	263	140	110	4 x 14	14
65		170	287	160	130	4 x 14	15
80		180	310	190	150	4 x 18	21
100		190	358	210	170	4 x 18	27
125		200	402	240	200	8 x 18	37
150		210	450	265	225	8 x 18	45
200		230	515	320	280	8 x 18	64
250		250	605	375	335	12 x 18	90
300		270	692	440	395	12 x 22	123