


CAST IRON GATE VALVE

**FACE TO FACE ACC TO DIN 3202 - F 4
PLUNGED MANDREL**

DN	40 - 1200
PN	10, 6, 4, 2.5 bar
T max	150°C

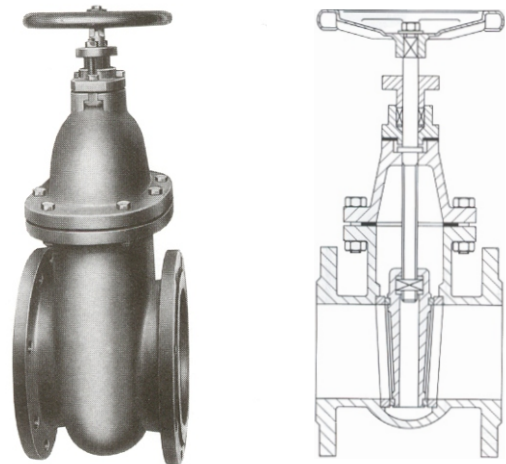


Application: As a closing valves at industrial pipe systems for water or non aggressive fluids.

parts	acc to DIN	Ws. №
Body and bonnet	GG 25	0.6025
Ring	GG 25	0.6025
Mandrel	X20Ch13	1.4021
Gasket	CuZn39Pb2	2.0380
Seal packing	-non asbestos -O-ring EPDM	

Note: The globe valve is offer with flanges acc to DIN - PN 10.

Size (mm):

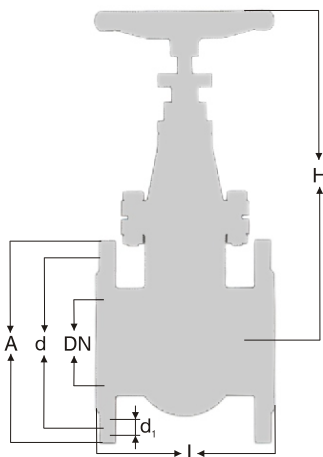

DN	PN	L	H	A	d	n x d ₁	kg
40	10	140	255	150	110	4 x 18	12
50		150	263	165	125	4 x 18	14
65		170	287	185	145	4 x 18	18
80		180	310	200	160	8 x 18	22
100		190	358	220	180	8 x 18	28
125	6	200	402	250	210	8 x 18	41
150		210	450	285	240	8 x 22	49
200		230	515	340	295	8 x 22	64
250		250	605	395	350	12 x 22	91
300		270	692	445	400	12 x 22	126
350	4	290	825	505	460	16 x 22	182
400		310	866	565	515	16 x 26	235
500		350	1060	670	620	20 x 26	342
600		390	1240	780	725	20 x 30	493
700		430	1700	895	840	24 x 30	840
800	2.5	470	1826	1015	950	24 x 33	1400
1000		550	2335	1230	1160	28 x 36	2400
1200		630	2790	1455	1380	32 x 39	4250