
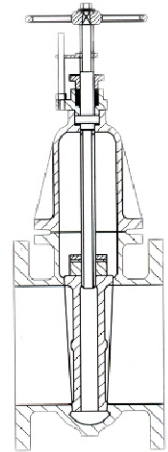


CAST IRON GATE VALVE

**FACE TO FACE ACC TO DIN 3202 - F 4
PLUNGED MANDREL
WITH DRAIN PLUG**

DN	40 - 700
PN	10, 6, 4, 2.5 bar
T max	150°C

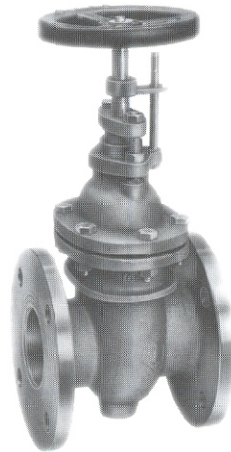

Application:

As a closing valves at industrial pipe systems for water or non aggressive fluids.


Materials:

parts	acc to DIN	Ws. №
Body and bonnet	GG 25	0.6025
Ring	GG 25	0.6025
Mandrel	X20Ch13	1.4021
Gasket	CuZn39Pb2	2.0380
Seal packing	-nonazbestos -O-ring EPDM	

Note:

The globe valve is offered with flanges acc to DIN - PN 10.

Size (mm):

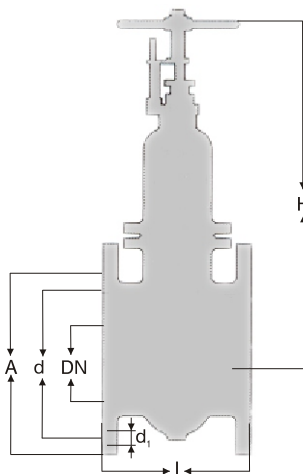

DN	PN	L	H	A	d	n x d ₁	kg
40	10	140	275	150	110	4 x 18	12
50		150	285	165	125	4 x 18	15
65		170	315	185	145	4 x 18	19
80		180	345	200	160	8 x 18	24
100		190	405	220	180	8 x 18	30
125		200	445	250	210	8 x 18	43
150	6	210	505	285	240	8 x 22	54
200		230	600	340	295	8 x 22	69
250		250	690	395	350	12 x 22	100
300		270	790	445	400	12 x 22	130
350	4	290	---	505	460	16 x 22	197
400		310	1026	565	515	16 x 26	247
500		350	1260	670	620	20 x 26	365
600	2.5	390	1480	780	725	20 x 30	519
700		430	1830	895	840	24 x 30	870