
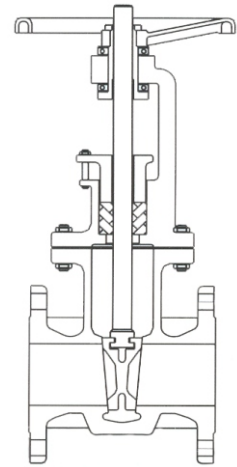


STEEL GATE VALVE

**FACE TO FACE ACC TO DIN 3202 - F 5
LIFT MANDREL**

DN	50 - 500
PN	16 bar
T max	350°C

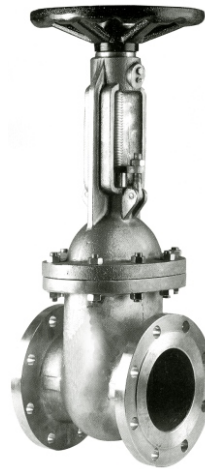


Application: As a closing valve in the industrial pipe systems for water, steam, non aggressive or light aggressive fluids.

Materials:	parts	acc to DIN	Ws. №
	Body bonnet and cotter	GS C 25	1.0619
	Ring	GS C 25	1.0619
	Mandrel	X20Ch13	1.4021
	Sealing rings		
	- body	X20Ch13	1.4021
	- cotter	12X18H10T	1.4021
	Sealing packing	non asbestos	

Note: The valve is offered with flanges acc. to PN 16 (as it is shown at the table).

Size (mm):

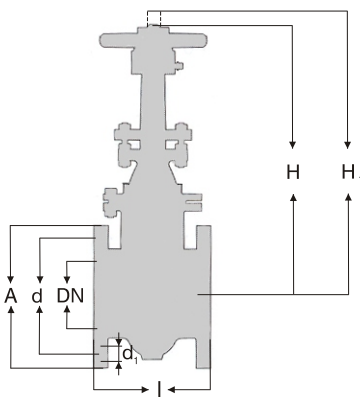

DN	L	H	H ₁	A	d	n x d ₁	Kg
50	250	359	426	165	125	4 x 18	29
65	270	434	520	185	145	4 x 18	38
80	280	456	555	200	160	8 x 18	49
100	300	524	644	220	180	8 x 18	61
125	325	601	746	250	210	8 x 18	95
150	350	670	845	285	240	8 x 22	135
200	400	820	1045	340	295	12 x 22	140
250	450	965	1245	405	355	12 x 27	220
300	500	1120	1450	460	410	12 x 27	339
350	550	1215	1580	520	470	16 x 27	420
400	600	1390	1810	580	525	16 x 30	495
500	700	1710	2230	715	650	20 x 33	900