


# STEEL GATE VALVE

## PLUNGED MANDREL TYPE B SCREWED ENDS

<b>DN</b>	<b>10 - 40</b>
<b>PN</b>	<b>160 bar</b>
<b>T max</b>	<b>500°C</b>

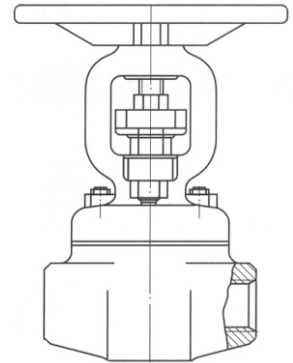


**Application:** As a on - off valves in pneumatic and hydraulic pipe systems.

**Materials:** Body, bonnet, special gate, flanges, plugs, gasket parts, nuts.

**Principle work:** Slighting and stopping of the fluid is made by cotted globe - metal to metal.

**Note:** The valve is offered with screwed ends acc to BDS 1998 - 74 NPT, BDS 2000 - 83 G.

**Size (mm):**

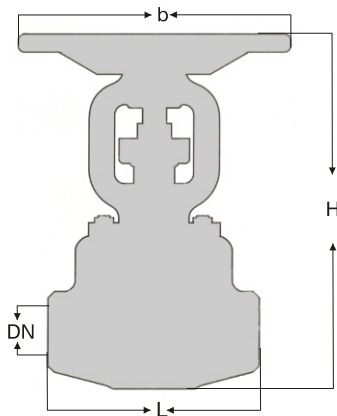

TYPE	DN	screwed ends	L	H	b	kg
<b>B 10</b>	10	1/2"NPT	84	150	110	2
<b>B 15</b>	15	3/4"NPT	84	152	110	2
<b>B 20</b>	20	G 3/4"	100	245	153	6
<b>B 25</b>	25	G 1"	100	245	153	6
<b>B 32</b>	32	G 1 1/4"	125	300	153	10
<b>B 40</b>	40	G 1 1/2"	125	305	153	10