


CAST IRON GLOBE VALVE

FACE TO FACE ACC TO
DIN 3202 - F 4

DN	15 - 200
PN	16 bar
T max	200°C

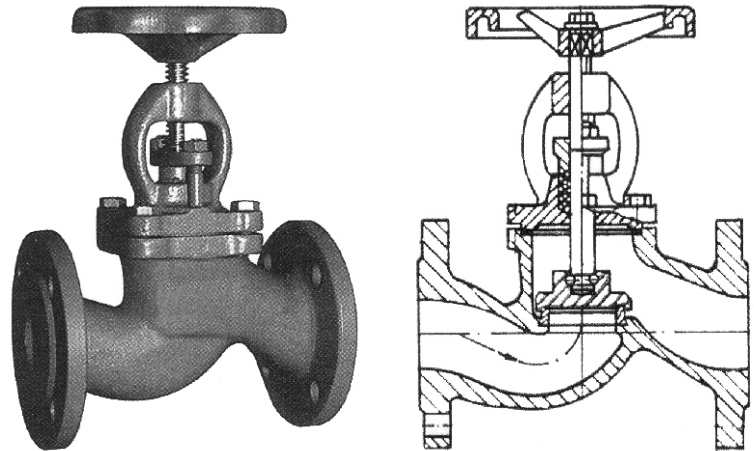

Application:

As a stop valves in the industrial pipe systems for water, steam, non aggressive fluids or gas.


Materials:

parts	acc to DIN	Ws. №
Body, bonnet	GG 25	0.6025
Ring	GG 25	0.6025
Mandrel	X20Ch13	1.4021
Globe	X12CrNiTi18 10	1.4541
	X12CrNiTi18 10	1.4541
Sealing packing	non asbestos	

Note:

The valve is offered with flanged ends acc to PN 16.

Size (mm):

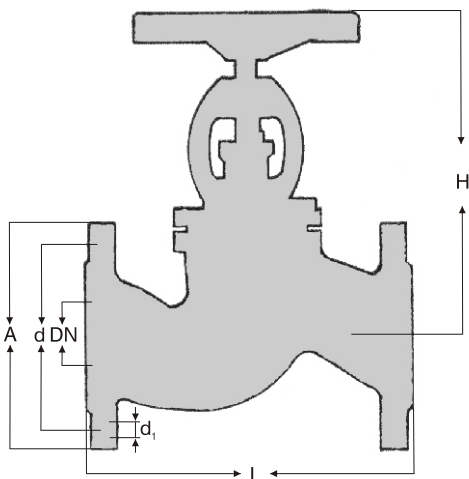

DN	L	H	A	d	n x d ₁	kg
15	130	182	95	65	4 x 14	4
20	150	180	105	75	4 x 14	5
25	160	185	115	85	4 x 14	6
32	180	220	140	100	4 x 18	10
40	200	227	150	110	4 x 18	11
50	230	228	165	125	4 x 18	14
65	290	276	185	145	4 x 18	22
80	310	278	200	160	8 x 18	25
100	350	343	220	180	8 x 18	46
125	400	352	250	210	8 x 18	54
150	480	448	285	240	8 x 22	89
200	600	520	340	295	12 x 22	158