


BRONZE GLOBE VALVE

**FACE TO FACE ACC TO
DIN 3202 - F 1**

DN	15 - 200
PN	40 bar
T max	350°C

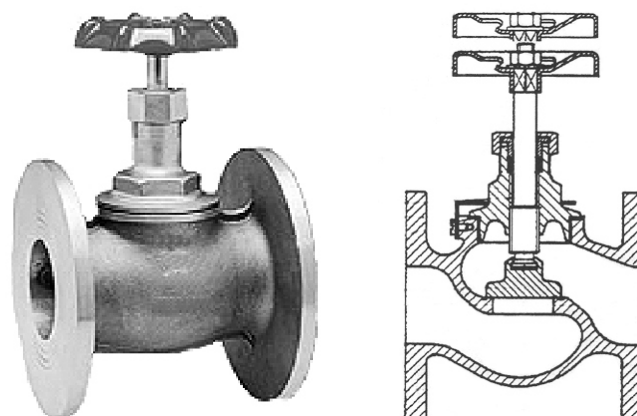

Application:

As a closing valves at ship's and industrial pipe systems for water, steam, or non aggressive fluids and gases.


Materials:

parts	acc to DIN	Ws. №
Body, bonnet	G-CuSn5ZnPb	2.1096.01
Globe	G-CuSn5ZnPb	2.1096.01
Mandrel	CuZn35Ni	2.0540
Ring	GG 20	0.6020
Sealing packing	non asbestos	

Execution:

stop valve
SDNR

Size (mm):

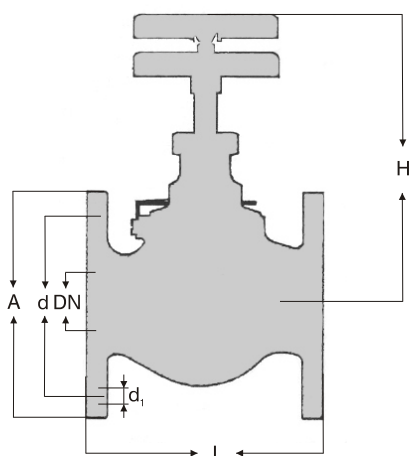

DN	L	H	A	d	n x d ₁	kg
15	70	115	95	65	4 x 14	1.5
20	80	125	105	75	4 x 14	2.3
25	90	140	115	85	4 x 14	2.7
32	105	155	140	100	4 x 18	4.5
40	120	175	150	110	4 x 18	6.3
50	140	195	165	125	4 x 18	8.0
65	180	225	185	145	4 x 18	11.6
80	200	225	200	160	8 x 18	16.0
100	230	280	220	180	8 x 18	21.0