



# STEEL BALL VALVE

**FACE TO FACE ACC TO  
DIN 3202 - F 1**

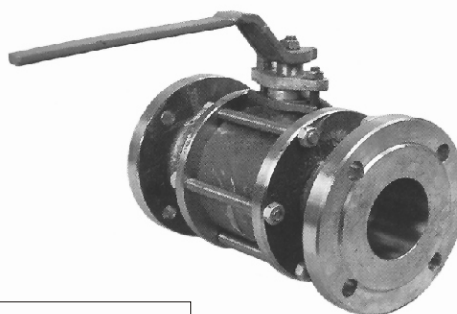


<b>DN</b>	<b>15 - 25</b>	<b>32 - 50</b>	<b>65 - 100</b>
<b>PN</b>	<b>40 bar</b>	<b>25 bar</b>	<b>16 bar</b>
<b>T max</b>	<b>180°C</b>	<b>180°C</b>	<b>180°C</b>


**Application:** For pipe system for transportation of water, steam or slight aggressive fluids.

<b>Materials:</b>	parts	acc. DIN	Ws. №
	Body	Cm 25Л	1.0405
	Ball	18H10ТЛ	1.4541
	Compressor	Cm 25Л	1.0405
	Spring body	18H9T	1.4308
	Pivot	18H9T	1.4308
	Bonnet seal	GG 20	0.6020
	Gasket	PTFE	

**Execution:**

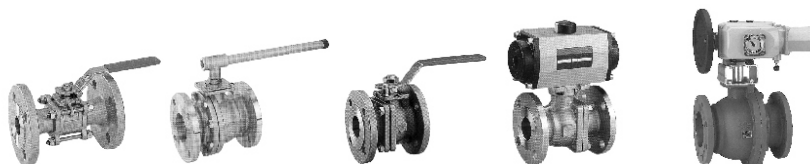

**Size (mm):**

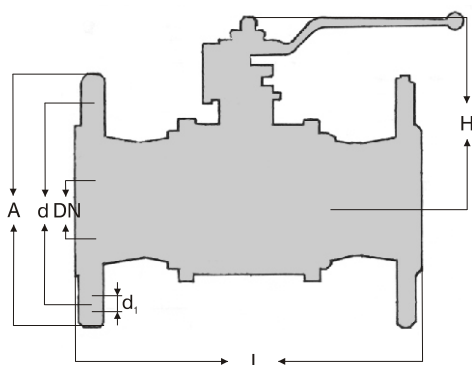

<b>DN</b>	<b>L</b>	<b>H</b>	<b>A</b>	<b>d</b>	<b>n x d<sub>1</sub></b>	<b>kg</b>
15	130	58	95	65	4 x 14	2.6
20	150	75	105	75	4 x 14	3.1
25	160	80	115	85	4 x 14	4.1
32	180	85	140	100	4 x 18	6.0
40	200	103	150	110	4 x 18	9.1
50	230	123	165	125	4 x 18	10.9
65	290	120	185	145	4 x 18	
80	310	170	200	160	8 x 18	
100	350	190	220	180	8 x 18	

**More than DN 100 - under enquiry.**