

STEEL BLIND FLANGE PN 16

ACC TO BDS 3418 - 73

DN	10 - 600
PN	16 bar
T max	300°C



Application:


As a bond between pipe systems and armature.

Materials:

parts	acc to DIN	Ws. №
Body	Bct3cn	

Size (mm):

DN	D	D ₁	D ₂	b	f	n	d	weight kg
10	90	60	40	12	2	4	14	0.5
15	95	65	45	12	2	4	14	0.5
20	105	75	58	12	2	4	14	0.7
25	115	85	68	12	2	4	14	0.8
32	135	100	78	12	2	4	18	1.2
40	145	110	88	14	3	4	18	1.6
50	160	125	102	14	3	4	18	2.0
65	180	145	122	14	3	4	18	2.5
80	195	160	138	14	3	4	18	2.9
100	215	180	158	16	3	8	18	4.1
125	245	210	188	16	3	8	18	5.5
150	280	240	212	18	3	8	22	8.0
200	335	295	268	20	3	12	22	12.8
250	405	355	320	24	3	12	26	22.0
300	460	410	378	28	4	12	26	34.0
350	520	470	438	32	4	16	26	49.0
400	580	525	490	36	4	16	30	70.0
450	640	585	550	42	4	20	30	99.6
500	710	650	610	46	4	20	33	133.0
600	840	770	720	54	5	20	39	220.0

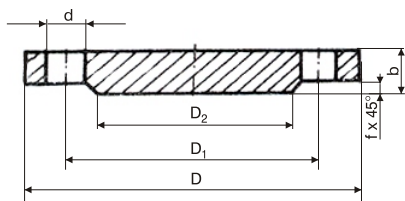

n = number of holes