


BRONZE GATE VALVE

**PLUNGED MANDREL
DIN 3352 T 12
SCREWED ANDS**

DN	8 - 80
PN	16 bar
T max	225°C

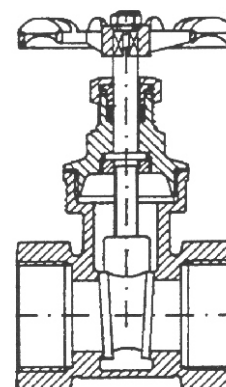


Application: As a closing valve in industrial pipe systems for water, steam, petroleum fluids.

Tmax / PN:
120° C max. 16 bar
120° C - 150° C max. 10 bar
150° C - 225° C max. 6 bar

Materials:	parts	acc to DIN	Ws. №
	Body	G - CuSn5ZnPb	2.1096.01
	Bonnet	CuZn40Pb2	2.0402
	Mandrel	CuZn40Pb2	2.0402
	Cotter	CuZn40Pb2	2.1096.01
	Ring	Al	
	Sealing packing	non asbestos	

Note: The valve is offered - BSPP.

Size (mm):

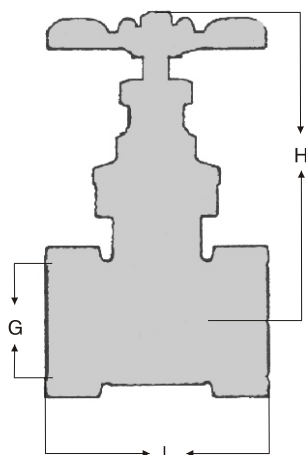

DN	G	L	H	Kg
8	R 1/4"	48	85	0.3
10	R 3/8"	48	85	0.3
15	R 1/2"	55	85	0.4
20	R 3/4"	60	105	0.5
25	R 1"	68	115	0.8
32	R 1 1/4"	76	130	1.1
40	R 1 1/2"	80	150	1.6
50	R 2"	93	180	2.4
65	R 2 1/2"	110	220	3.9
80	R 3"	120	250	5.8