

# JIS GLOBE VALVES 5k, STRAIGHT TYPE CAST IRON

<b>DN</b>	<b>50 - 150</b>
<b>Pressure</b>	<b>5 kgf / s2</b>
<b>Valve standard</b>	<b>JIS F7305</b>




**Application:**

Used in cooling water systems and low pressure steam systems.

**Materials:**

parts	JIS	no DIN	Ws. №
Body/bonnet	FC 20	GG 20	0.6020
Disc, seat	BC 6	Bronze (Rg 5)	2.1096.01
Handwheel	FC 20	GG 20	0.6020

**Size (mm):**

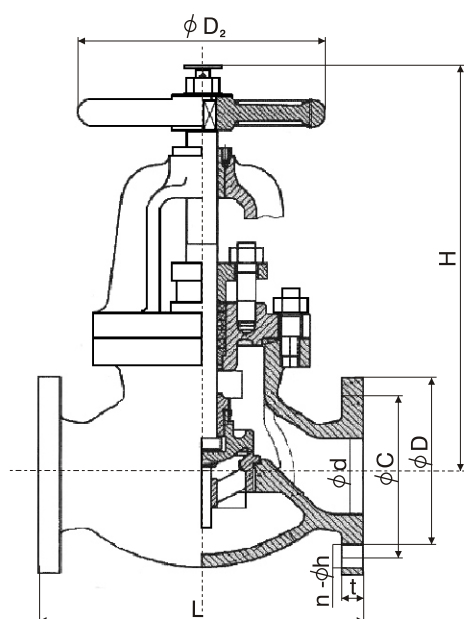

DN	Pressure kgf/sm <sup>2</sup>	Flange Bolt Hole									Weight kg
		d	L	D	C	n	h	t	H	D <sub>2</sub>	
50	5 k	50	210	130	105	4	15	16	270	160	14.7
65	5 k	65	250	155	130	4	15	18	300	180	21.3
80	5 k	80	280	180	145	4	19	18	310	180	27.7
100	5 k	100	340	200	165	8	19	20	360	224	40.8
125	5 k	125	410	235	200	8	19	20	390	250	57.6
150	5 k	150	480	265	230	8	19	22	445	280	80.3