


STEEL GLOBE VALVE

WELDING ENDS

DN	15 - 125
PN	320 bar
T _{max}	550°C

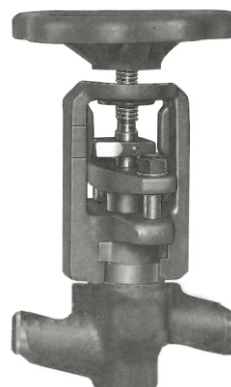


Application: For pipe systems transporting super heated steam.

Materials:

parts	acc to DIN	Ws. №
Body	C22.8	1.0460
	16Mo3	1.5415
	13CrMo4-5	1.7335
	10CrMo9-10	1.7380
	14MoV6-3	1.7715
Bonnet	C22.8	1.0460
	13CrMo4-5	1.7335
Pivot, globe	X20Cr13	
Sealing ring	X20CrNi17 2	
	SGX15CrNiMn188	
Sealing gasket	stelit 6	
	graphite	

Size (mm):

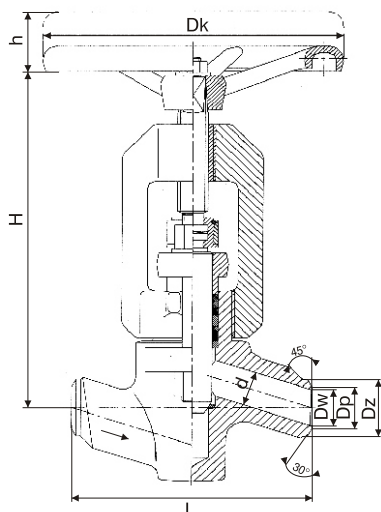

DN	d	Dz	Dp	Dw	L	H	h	Dk	kg
15	14	28	19	16	160	235	15	160	9.0
20	20	34	27	24	160	240	15	200	9.0
25	24	40	29	26	160	240	15	200	9.0
32	32	45	36	33	300	365	27	320	30.0
40	38	54	45	41	300	365	27	320	30.0
50	48	72	65	61	300	365	27	360	30.0
65	62	90	71	68	340	450	30	360	40.0
80	76	115	90	86	380	580	40	400	70.0
100	92	133	109	101	430	620	55	400	90.0
125	112	159	141	124	500	670	65	400	125.0