
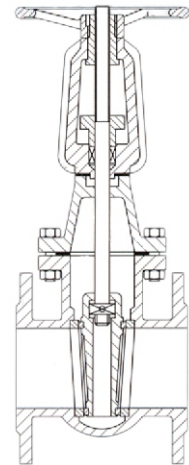


# CAST IRON GATE VALVE

**FACE TO FACE ACC TO DIN 3202 - F 4  
PULL OUT MANDREL**

<b>DN</b>	<b>40 - 300</b>
<b>PN</b>	<b>6 bar</b>
<b>T max</b>	<b>150°C</b>

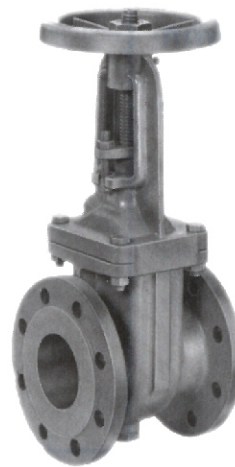

**Application:**

As a closing valves at industrial pipe systems for water or non aggressive fluids.


**Materials:**

parts	acc to DIN	Ws. №
Body and bonnet	GG 25	0.6025
Ring	GG 25	0.6025
Mandrel	X20Ch13	1.4021
Gasket	CuZn39Pb2	2.0380
Seal packing	-non asbestos -O-ring EPDM	

**Note:**

The globe valve is offer with flanges acc to DIN - PN 6.

**Size (mm):**

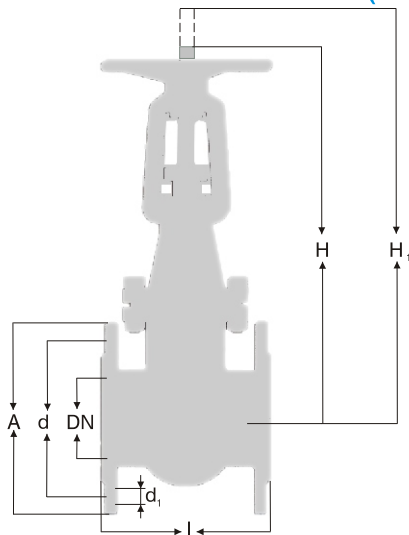

DN	PN	L	H	H <sub>1</sub>	A	d	n x d <sub>1</sub>	kg
40	6	140	305	345	130	100	4 x 14	12
50		150	318	378	140	110	4 x 14	15
65		170	330	395	160	130	4 x 14	20
80		180	340	425	190	150	4 x 18	24
100		190	437	543	210	170	4 x 18	31
125		200	544	679	240	200	8 x 18	45
150		210	613	778	265	225	8 x 18	49
200		230	765	980	320	280	8 x 18	69
250		250	890	1154	375	335	12 x 18	93
300		270	1060	1375	440	395	12 x 22	125